

**NOVAFLEX**  
PROVIDING HOSE & DUCT SOLUTIONS




## Marine Hoses

## Water and Exhaust

### SERIES 120/121 BILGE PUMP HOSE

Designed for bilge discharge applications. The flexible corrugated polyethylene construction provides maximum flexibility and ease of installation with a molded cuff every twelve inches. Available in black (120) and white (121).

**SIZE: 5/8", 3/4", 1 1/8", 1 1/4", 1 1/2"**



### SERIES 150/150 HD CLEAR PVC TUBING

Vinyl tubing produced with FDA approved material. Applications include sink drains, ice boxes and refrigerators. Available in heavy duty version (150 HD) NOT RECOMMENDED FOR HOT WATER OR BELOW WATER LINE.

**SIZE: 3/16", 1/4", 3/8", 1/2", 5/8", 3/4", 1", 1 1/4", 1 1/2"**



### SERIES 130 WATER / HEATER HOSE

General purpose water hose that can be used for ice box, sink and shower drain lines, air conditioning circulation, bilge and bait box applications. Available in black 90psi (130) and 200psi (132). Available in red 200psi (135).


**SIZE: 1/2", 5/8", 3/4", 1"**



### SERIES 162 CLEAR REINFORCED PVC HOSE (RED TRACER)

Heavy duty red and white reinforced clear PVC hose designed for various water applications such as drain lines and air conditioner circulation. Produced with FDA approved materials, this hose is non-toxic, tasteless, and odorless, which makes it an excellent choice for hot or cold potable water applications.


**SIZE: 3/8", 1/2", 5/8", 3/4", 1", 1 1/8", 1 1/4", 1 1/2"**



### SERIES 141/142 CORRUGATED PVC BILGE HOSE (CLEAR w/GRAY ROD)

Flexible PVC hose produced with FDA approved compound and designed primarily as a discharge hose. Applications include: potable water fill, drain lines, livewell aerators and bilge discharge. Available with black rod (142). NOT DESIGNED FOR BELOW WATERLINE APPLICATIONS.


**SIZE: 3/4", 1", 1 1/8", 1 1/4", 1 1/2", 3"**



### SERIES 164 WHITE REINFORCED PVC HOSE (BLUE TRACER)

Heavy duty blue and white reinforced PVC hose with opaque white liner. Designed for various water applications such as drain lines, wash down and air conditioner circulation. Produced with FDA approved materials this hose is non-toxic, tasteless, and odorless, which makes it an excellent choice for hot or cold potable water applications.


**SIZE: 1/2", 5/8", 3/4"**



### SERIES 149 H. D. PVC LIVEWELL HOSE

Heavy duty PVC hose designed for bilge, livewell circulation, sink and baitwell drains. Smooth interior and exterior provide excellent clamping surface. Helical rod design provides excellent flexibility and collapse resistance.

**SIZE: 5/8", 3/4", 1", 1 1/8", 1 1/4", 1 1/2", 1 7/8", 2"**




## Water and Exhaust

### SERIES 200 SOFTWALL EXHAUST HOSE

Designed for a wide range of water transfer and discharge applications as well as the tough demands of wet exhaust. The softwall (non-wire) construction is designed for straight routings. An excellent choice for bilge, toilet, scupper and water discharge applications that are straight. Meets SAEJ2006 R1 for marine exhaust hose. Available in heavy duty version (260).

**SIZE: 3/4" to 18"**



### SERIES 250 HARDWALL EXHAUST HOSE

Designed for a wide range of demanding engine applications from water intake and engine coolant to marine wet exhaust. It's wire helix construction provides excellent flexibility and bend radius. Also an excellent choice for bilge discharge, toilet and holding tank connections, water discharge and scupper lines. Meets SAEJ2006 R2 for marine exhaust hose. Available in heavy duty version (210).


**SIZES: 1/2" to 18"**



### SERIES 252 CORRUGATED EXHAUST HOSE

Designed to meet the tough demands of wet exhaust. The hose is constructed to resist panting, vibration and wall collapse. Helical wire construction (hardwall) allows the hose to accept bending without collapsing. The minimum designed bend radius of the hose is calculated by multiplying the inside diameter of the hose by four. The corrugated design is more flexible than the 250 Series hose making it a better choice for tight bends and retro fit applications.

**SIZES: 1" to 12"**




## Marine General Purpose

### SERIES 128 SPLIT CONDUIT HOSE

Flame retardant cable/wire harness cover. Split for easy access to route wires. V2 Rated UL 94A. Available in black or white.

**SIZES: 1/4", 3/8", 1/2", 5/8", 3/4", 1", 1 1/4", 1 1/2", 2"**



### SERIES 186 OUTBOARD MOTOR BRACKET HOSE

Cable conduit designed to conceal hose or cable of outboard motor. Available in black or grey.


**SIZES: 1 1/2", 2"**



### SERIES 400/402 VENTILATION DUCTING

Flame resistant PVC ducting designed for venting bilge gases. Ozone and sunlight resistant. Available in white (402).

**SIZE: 3", 4"**

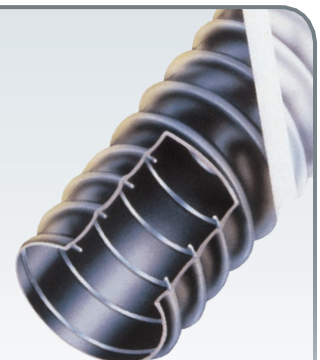



## Marine Fuel

### SERIES 360-09 FUEL FEED AND VENT HOSE (BARRIER)

Designed to meet fuel hose specifications of SAE J1527, AI-15, ISO 7840, and certified to be EPA compliant. The barrier construction provides the lowest permeation rating available for any marine fuel hose. Formulated to handle gasoline, diesel and alcohol blended fuels. This hose meets all the requirements of the USCG, NMMA, ABYC and is certified by IMCI for use in the European community. The 360-09 series is an A-1-10 hose that can be used in a feed or vent application. The flame resistant cover is designed for enclosed engine compartment applications

**SIZE: 1/4", 5/16", 3/8", 1/2", 5/8"**



### SERIES 360-03 VENT HOSE (ALL RUBBER)

Designed to meet vent hose specifications of SAE J1527 and ISO 7840. The all rubber construction offers greater flexibility and compression for ease of coupling installation. Formulated to handle gasoline, diesel and alcohol blended fuels. The flame resistant cover is designed for enclosed engine compartment applications.


**SIZE: 5/8"**



### SERIES 375 SMOOTH FUEL FILL HOSE

Designed to meet fuel hose specifications of SAE J1527 and ISO 7840. The helical wire construction provides flexibility and collapse resistance for applications requiring a tight bend radius. This hose meets all the requirements of the USCG, NMMA, ABYC and is certified by IMCI for use in the European community. This A-2 hose is designed for fill applications where the fuel is not normally continuously in the hose. The flame resistant cover is designed for enclosed engine compartment applications.

**SIZE: 1/2" to 8"**




## Sanitation

### SERIES 104 COST EFFECTIVE PREMIUM SANITATION HOSE

The industry's cost effective rubber sanitation hose. Designed and compounded to provide resistance to odor permeation. Helical wire construction provides flexibility and collapse resistance for applications requiring a tight bend radius. Best choice for connection between head and holding tank, and holding tank to pump out.


**SIZE: 1", 1 1/4", 1 1/2", 1 7/8", 2", 2 1/4"**



### SERIES 104OB ODOR BLOCK SANITATION

The best rubber sanitation hose available to prevent odor permeation in marine waste systems. New copolymer tube designed to exceed industry requirements and be highly flexible and easy to connect. Suction (full vacuum) and discharge applications. Operating temperature: -40° to 200°F (-40° to 93°C) Max Working Pressure: 75psi with worm gear clamps 150 psi with industrial couplings & clamps or bands.


**SIZE: 1", 1 1/2"**



### SERIES 140 CORRUGATED PVC SANITATION HOSE

Flexible PVC hose designed primarily as a discharge hose. Applications include: potable water fill, drain lines, holding tank pump-out and bilge discharge. FDA approved compound. NOT DESIGNED FOR BELOW WATERLINE APPLICATIONS.

**SIZE: 5/8", 1", 1 1/2", 2"**



### SERIES 148 H. D. SMOOTH PVC SANITATION HOSE

Heavy duty PVC hose designed for sanitation systems. Smooth interior and exterior provide excellent clamping surface. Helical rod design provides flexibility and collapse resistance. Produced with FDA approved materials.

**SIZE: 5/8", 3/4", 1", 1 1/8", 1 1/4", 1 1/2", 2"**

